

OM-8

Fiber Optic Ethernet Transceiver



Specifications

ELECTRICAL

Data Rate	10Mbps IEEE 802.3 compatible
Data I/O connector	DA-15P
Power source	External, provided by network card
Supply voltage range	11.3 V to 14.8 V DC
Power consumption	2.3 Watts

GENERAL

Operating temperature	0°C to 50°C
Humidity (RH)	10% to 95%
MTBF	>50,000hrs.
Dimensions (H*W*D)	1.4 * 4.1 * 8.7 cm


*Specifications subject to change without notice

Accessories

The MC-OM8 plastic mounting clip holds one OM-8. The modem clips into the bracket and may be installed or removed without the use of tools. The mounting clip may be attached to any surface using double sided adhesive tape, or screws.



Part Numbers

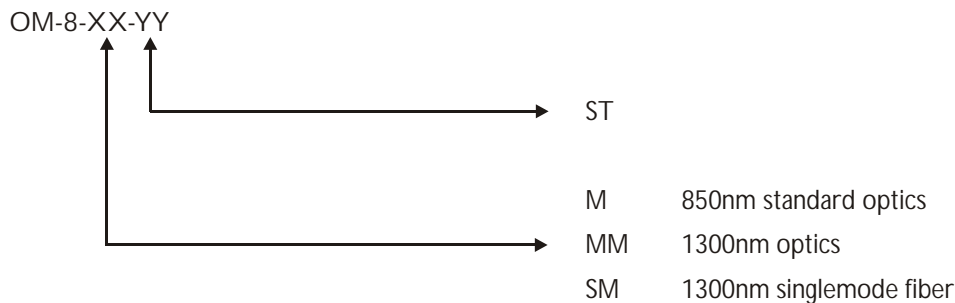

MC-OM8

Mounting clip

CABLE-OM8

60cm - DB15M (STUDS) to DB15F (CLIPS)

17/08/04

LUXCOM Technologies Inc.

102 Walgreen Road, Ottawa, Ontario K0A 1L0 Canada Tel.: +1 (613) 831-7777 Fax: +1 (613) 831-7778
email: sales@luxcom.com www.luxcom.com